



PCT/GB2003/002870.



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 01 AUG 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

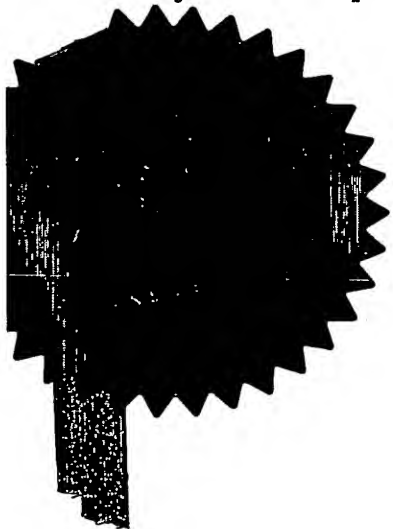

Signed

Stephen Hordley

Dated 18 July 2003

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Patents

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
A
- 3 JUL 2002
RECEIVED BY FAX

The
Patent
Office

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

AJC/P100377GB

2. Patent application number

(The Patent Office)

0215341.9

3 JUL 2002

03JUL02 E730517-1 002973
P01/7700 0.00-0215341.9or the or of
(underline all surnames)

British Nuclear Fuels plc
Risley
WARRINGTON
WA3 6AS

Patents ADP number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

UK

350108001

4. Title of the invention

STORAGE OF HAZARDOUS MATERIALS

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Belgrave Hall
Belgrave Street
LEEDS
LS2 8DD

Patents ADP number (if you know it)

4571001

7631310002

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an
applicant, or
c) any named applicant is a corporate body;
See note (a))

Yes

Patents Form 1/77

Patents Form

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

4

Claim(s)

2

Abstract

1

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Harrison Goddard Foute

3 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Tony Chalk

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

STORAGE OF HAZARDOUS MATERIALS**Field of the Invention**

This invention relates to a method for the treatment and storage of hazardous materials by encapsulation. More specifically, it is concerned with the encapsulation in cementitious media of materials encountered in the nuclear industry, and has specific application to uranium and so-called Magnox fuel elements.

Background to the Invention

Encapsulation has proved to be an especially favoured method for the disposal of certain hazardous materials; specifically it provides a suitable means for the conversion of these materials into a stable and safe form, which allows for long-term storage and/or ultimate disposal. The technique can find particular application in the nuclear industry, where the highly toxic nature of the materials involved, and the extended timescales over which the toxicity is maintained, are the principal considerations when devising safe disposal methods.

In co-pending GB patent application No. 0130593.7, the present applicant has disclosed the use of cementitious grouting materials for the encapsulation of fine particulate sized wastes and provided details of a method for the encapsulation of fine particulate materials which comprises treating these materials with at least one microfine hydraulic inorganic filler.

The use of cement based injection grouting in the construction industry is well known from the prior art. Thus, EP-A-412913 teaches the use of a Portland Cement based grout in the consolidation of concrete structures affected by fine cracks, providing a cost-effective means of infilling both superficial and deeper fissures and cavities in such structures, including such as buildings, bridges and dams. Similarly, ZA-A-9209810 is concerned with a pumpable, spreadable grouting composition incorporating a cementitious and/or pozzolanic or equivalent material, and its

application in sealing fissures and cracks, back-filling, providing mass fills in civil and mining works, or lining tunnels.

Also disclosed in the prior art are hydraulic setting compositions comprising particles
5 of Portland Cement together with fine particles of silica fume containing amorphous
silica, which are the subject of EP-A-534385 and are used in the production of
concrete, mortar or grout having improved fluidity, whilst GB-A-2187727 describes
a rapid gelling, hydraulic cement composition which comprises an acrylic gelling
agent, a fine filler and Portland Cement, this composition being thixotropic and
10 finding particular application in the formation of bulk infills for underground mining,
and in the filling of voids and cavities in construction or civil engineering. A
composition which also is useful in general building and construction work, and as
an insulating material comprises a particulate filler, cellulose fibres and a
cementitious binder, and is disclosed in GB-A-2117753.

15 Whilst the majority of these compositions of the prior art have a requirement for the
addition of water, EP-A-801124 is concerned with a dry mixture, used for fine soil
injection grout preparation, the mixture comprising fillers which do not react with
water, cement and deflocculant; on addition of water, an agglomerate-free fine grout
20 is formed, and this is easily injected into fine soil.

Thus, the use of such grouting materials in – primarily – civil engineering is well
known, and its use in treating fine particulate sized wastes in the nuclear industry is
the subject of the above co-pending application. However, whilst attempts have
25 previously been made to encapsulate broken Magnox fuel elements, the treatment of
uranium metal and complete Magnox fuel elements involved in nuclear processing
has always been reliant on reprocessing techniques, many of which are well known to
those skilled in such technology. Nevertheless, there has long been a need for an
alternative approach for dealing with such bulk fuel materials, particularly for those
30 cases where reprocessing is especially difficult or hazardous – or, on occasions,
impossible.

The present inventors have now found that cured cementitious materials may advantageously be employed for the long term encapsulation of uranium and Magnox fuel elements, as well as fuel element debris, thereby providing a product which remains stable and monolithic for many hundreds of years. Hence, a treatment method is provided which affords much greater efficiency, convenience and safety in handling, and has a consequent beneficial effect both in terms of environmental considerations and cost, thereby satisfying a long felt need in the nuclear industry wherein the waste management of materials is receiving ever greater attention in the global drive to ensure ever higher safety standards.

Statements of Invention

Thus, according to the present invention there is provided a method for the encapsulation of a nuclear material which comprises treating the material with an encapsulant which comprises a cementitious material and curing said cementitious material.

Generally, the nuclear material comprises a bulk nuclear fuel material, preferably uranium metal or Magnox fuel elements or fuel element debris. Alternatively, it may comprise, for example, fast reactor fuel or oxide fuel.

The cementitious material may typically comprise, for example, Portland Cement or a similar commercially available product.

One or more additional inorganic fillers may optionally be added to the cementitious material; suitable fillers include blast furnace slag, pulverised fuel ash, hydrated lime, finely divided silica, limestone flour and organic and inorganic fluidising agents.

The invention also provides a method for the storage of a nuclear material which comprises encapsulation of the material in a cured cementitious material.

Description of the Invention

The method of the present invention is of particular value in the treatment of bulk nuclear fuel materials. Such materials may be treated by this method in order to obtain a product which remains stable and monolithic for many hundreds of years, thereby offering a safe and convenient alternative means of handling other than nuclear fuel reprocessing.

There exists a considerable worldwide stock of such bulk nuclear fuel materials for which a suitable disposal route is required. This accumulation of this stockpile provides powerful evidence of the absence of any suitable method of treatment. However, the present method now offers a safe and convenient technique for their disposal which should provide considerable environmental benefits.

A particular example of the application of the method involves placing the nuclear material in an appropriate container and adding a suitable cementitious material. Elements of the nuclear material may either be arrayed in the container or mixed haphazardly. The cementitious material is then added and allowed to cure, and the container may then be capped or, alternatively sent directly for storage or final disposal.

The container may comprise any container of an appropriate form and size, for example a drum having a capacity in the region of 50 litres. In such a case, the amount of nuclear material which may safely be stored may be up to as many as 52 elements. Preferably, however, the number of elements would be of the order of 22.

Typically, the cementitious material is provided in the form of an aqueous composition with a water content preferably in the region of 40-50% (w/w). Thus, the material may conveniently be pumped under pressure into the container.

CLAIMS

1. A method for the encapsulation of a nuclear material which comprises treating the material with an encapsulant which comprises a cementitious material and curing said cementitious material.
2. A method as claimed in claim 1 wherein the nuclear material comprises a bulk nuclear fuel material.
3. A method as claimed in claim 2 wherein the bulk nuclear fuel material comprises uranium metal or Magnox fuel elements or fuel element debris.
4. A method as claimed in claim 1, 2 or 3 wherein the cementitious material comprises Portland Cement.
5. A method as claimed in any preceding claim wherein the cementitious material additionally comprises one or more inorganic fillers selected from blast furnace slag, pulverised fuel ash, hydrated lime, finely divided silica, limestone flour and organic and inorganic fluidising agents.
6. A method as claimed in any preceding claim wherein the cementitious material is provided in the form of an aqueous composition.
7. A method as claimed in claim 6 wherein the water content of the composition is in the region of 40-50% (w/w).
8. A method as claimed in any preceding claim wherein the nuclear material is placed in an appropriate container and a cementitious material is added and allowed to cure.

9. A method as claimed in claim 8 wherein elements of the nuclear material are either arrayed in the container or mixed haphazardly.
10. A method as claimed in claim 8 or 9 wherein the container is subsequently capped.
11. A method as claimed in claim 8, 9 or 10 wherein the container comprises a drum having a capacity in the region of 50 litres.
12. A method as claimed in claim 11 wherein the amount of nuclear material stored is up to 52 elements.
13. A method as claimed in claim 12 wherein the number of elements is of the order of 22.
14. A method for the storage of a nuclear material which comprises encapsulation of the material in a cured cementitious material.
15. A method for the encapsulation of a nuclear material substantially as herein described.
16. A method for the storage of a nuclear material substantially as herein described.

ABSTRACT

The invention provides a method for the encapsulation of a nuclear material which comprises treating the material with an encapsulant which comprises a cementitious material, such as Portland Cement, and curing said cementitious material. The method is particularly suitable for the treatment of bulk nuclear fuel materials such as uranium metal, complete Magnox fuel elements, or fuel element debris, for which encapsulation treatments have never previously been known. Such materials may be treated by the method of the invention in order to obtain products which remains stable and monolithic for many hundreds of years, and the invention thereby offers a safe and convenient alternative means of handling other than nuclear fuel reprocessing.

P100377.2GB

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.